


Perforated panel

No.:PA6012T Materials:Grade AA aluminum alloy Surface finish:Akzo Nobel Powder coating Specifications:600mm × 1200mm Standard thickness:1.0mm



Plain panel

No.:PA6012 Materials:Grade AA aluminum alloy Surface finish:Akzo Nobel Powder coating Specifications:600mm×1200mm Standard thickness:1.0mm



A-shaped carrier

No.:PAL01 Materials:Steel Surface finish:Galvanization Height:40mm Length:3000mm Standard thickness:0.5/0.6mm



A-shaped carrier connector

No.:PAL01L
Materials:Steel
Surface finish:Galvanization
Height:35mm
Length:100mm
Standard thickness:0.35mm



A-shaped carrier hanger

No.:PAL0150J Materials:Steel Surface finish:Galvanization Height:78/103mm Standard thickness:1.0mm



Triangle carrier

No.:PBL01 Materials:Steel Surface finish:Galvanization Height :24/28mm Length:3000mm Standard thickness:0.35/0.4mm



Triangle carrier connector

No.:PBL01L Materials:Steel Surface finish:Galvanization Length:65mm Standard thickness:0.4mm



Triangle carrier hanger

No.:PBL01J Materials:Steel Surface finish:Galvanization Height:90mm Standard thickness:0.6mm



Main runner

No.:PGG01 Materials:Steel Surface finish:Galvanization Height:38/50mm Length:3000mm Standard thickness:0.6/0.8mm



Main runner hanger

No.:PGG01J Materials:Steel Surface finish:Galvanization Height:85mm Standard thickness:1.0mm



Main runner connector

No.:PGG01L Materials:Steel Surface finish:Galvanization Height:35mm Standard thickness:0.7mm



M8 bar

No.:PGG01D Materials:Steel Surface finish:Galvanization



L25 wall angle


No.:PXL02T Materials:Grade AA aluminum alloy Surface finish:Akzo Nobel powder coating Specifications:25mm × 25mm Length :3000mm Standard thickness:0.8mm



W25 wall angle

No.:PXW02T Materials:Grade AA aluminum alloy Surface finish:Akzo Nobel powder coating Specifications:25mm × 25mm × 25mm Length:3000mm Standard thickness:0.8mm

Installation Diagram

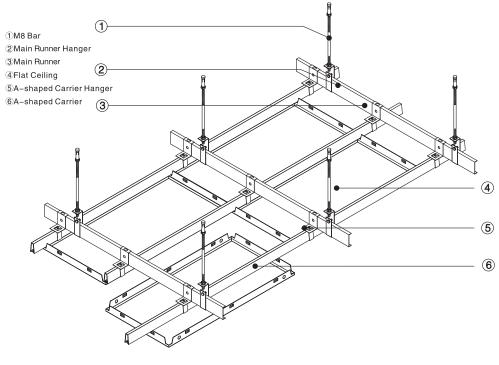

■ (Size): 300 × 300mm, 300x600mm, 300x1200mm, 300x1800mm, 400 × 400mm, 400x1800mm, 500x500mm, 600x600mm, 600x1200mm, 600x2400mm, 618x618mm, 800x800mm

Clip-in ceiling, also named open frame ceiling, was derived from Germany with advanced & unique production technology, which is the superior product of OUSILONG, with professional mold design, even panel surface, distinct edges & lines, and clear & concise. All of these create a pleasant visual space. OUSILONG ceilings feature at fireproof, anti-corrosion, thermo stability, and good weather resistance. The colors keep fresh for a long time. Many kinds of sizes are available. "#" -shaped roof beam, "#" -shaped partition, strip partition and other diving joint effect can be achieved. Matched with non-standard aluminum panel in installation, it will perform better. OUSILONG ceilings meet different design & requirements, widely used in all kinds of buildings. With reasonable prices, we can deliver goods in a week as fast as we can.

